



# New and very compact rivet feeder has been launched!

Can be used for Flexible line and Cell manufacturing system!  
Realize easy automatic rivet feeding!



Easy to carry around  
owing to its desktop size!

**ARF-800P**  
**Auto rivet feeder**

## Auto Rivet Feeder **ARF-800P**

MADE IN JAPAN

**Adaptable to changes in workplace and Easy to carry around**  
**Achieved greater flexibility in installation site!**

### ■ Features

#### Achieved greater productivity!

- High speed rivet feeding
- Able to feed 20pcs rivets per 1 minute.

■ Comparison of feeding work  
 By hand **1820minutes**

**ARF-800P 1340minutes** **480 minutes reduced**

[ Measuring condition ]

When needs to hold workpiece by one hand, compared man-hour of 1,000pcs of riveting work per day/person for 20 days.


#### Improving energy saving performance!

Compared to conventional model (ARF700)

Installation space **55% reduced**

Weight **70% reduced**

Air consumption **23% reduced**

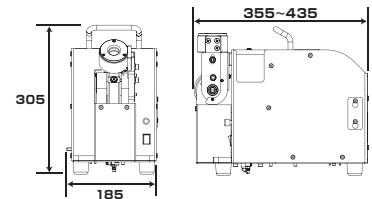

■ Dimensional drawing (unit: mm)

### ■ Specification

Weight	10.9kg (24lb)
Electric power source	AC 100~240V (50~60Hz)
Operating voltage	DC 12 V
Consumption current	<1A
Operating air pressure	0.5~0.6MPa
Air consumption	Per 1 rivet 3.1 ℓ /Pcs When using 20 rivets per 1 minute 62 ℓ /Minutes
Applicable rivet size	2.4mm (3/32"), 3.2mm (1/8"), 4.0mm (5/32")
Operation environments	Ambient temperature 5~40°C Humidity less 80%RH (No bedewing)
Range of storage temperature	-5~55°C
Noise emission	<75dB
Diameter of air supply	φ6mm (One touch air joint) ※1

※1 Prepare the air connector and tube of φ6mm

### ■ Type of ARF800P

	Compatible rivets	Diameter of frame head holder	Riveters
ARF800P	-24 -32 -40	-A (19mm)	AR-2000SV
	-24 -32 -40	-B (21mm)	R1A1※2 AR-2000MV
	-24 -32 -40	-C (23mm)	ARV-011M, ARV-015M, ARV-022M, ARV-025M

※2. When using old frame head which diameter is 22mm, it needs to be changed to new frame head (21mm).


Ex: When using AR-2000MV and need rivet feeder for 3.2mm (1/8") rivets, purchase by part number ARF800P-32B (21mm).



information



#### Smaller footprint!




- Easy to set up
- Only requires A4 size of space to set up!

#### Portable



- Easy to carry around
- Only 10.9kg (24lb) in weight

#### Adjustable to best position



Adjustable in 3 angles

#### Large capacity of basket



Rivet diameter	2.4mm (3/32"), 3.2mm (1/8")
	<b>1000Pcs</b>
Rivet diameter	4.0mm (5/32")
	<b>500Pcs</b>


## Auto Rivet Feeder **ARF-700**

MADE IN JAPAN

• If you are using 4.8mm blind rivet • If you need larger basket capacity



### ■ Dimensional drawing (unit: mm)

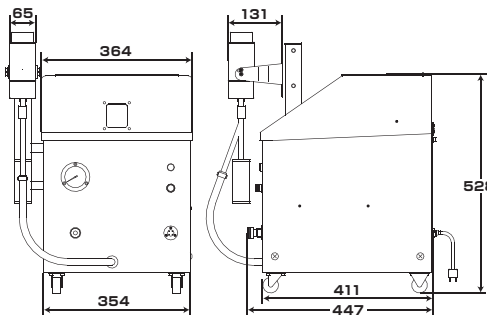

### ■ Specification

Weight	32kg (70.5lb), G.W.36kg (79.4lb)
Operating air pressure	0.5~0.6MPa
Electric power source*	AC100V (50/60Hz)
Air consumption	Per 1 rivet 4 ℓ /Pcs When using 20 rivets per 1 minute 120 ℓ /Minutes
Power consumption	70W

※AC220V (50/60Hz), AC120V (60Hz) optional

### ■ Type of ARF700

Part Number	Rivet size	Basket Capacity
ARF-700-32	4-1 ~ 4-6	2000Pcs
ARF-700-40	5-2 ~ 5-6	1500Pcs
ARF-700-48	6-2 ~ 6-6	1000Pcs

information



※For CE compliance, contact your nearest Lobster dealer for the price or any other inquiry.

※ARF-800P, ARF700 are build-to-order products. Contact your nearest Lobster dealer for the price or any other inquiry.

⚠ Caution for secure usage

Be sure to read enclosed Instruction Manual carefully and make sure that you understand them thoroughly before using this tool.

● All dimensions are nominal and subject to tolerances.

● Specification are subject to change without prior notice.



**LOBTEX CO.,LTD.**

International Marketing Group

TEL+81(72)981-7466 FAX+81(72)981-9420  
 12-8 Shijo-Cho, Higashi-Osaka City, Osaka 579-8053 Japan  
 URL : www.riveter.com www.lobtex.co.jp/

No.16N-2000TO